




## PRODUCT OVERVIEW

Crack Pack Master Compound is a combination of emulsified Multi Polymer, Co-Polymer and Cross Linked Polymers (Acrylic, PVC, PVAC, SBR) with inert mineral materials and various additives for generation useful properties such as flexibility, tackiness, adhesion, water and acid proofing after curing. It is flexible designed to seal cracks & and pipe joints with high durability and ease of application. Its various applications are :

- » Crack Seal
- » Pipe Joints
- » Joints of Aluminium Frame Joints
- » Screw holes of tin sheds.

### PRODUCT BENEFITS

-  Highly Flexible
-  High Bonding
-  100% Water Proof

### PACKING

- 16 Kg.
- 4 Kg.
- 1 Kg.
- 500 Gm
- 250 Gm
- 125 Gm
- 50 Gm



Shelf life : 3years from the date of manufacture in original tight closed containers & to be stored away from direct sunlight and excessive heat.


## TECHNICAL SPECIFICATION

Properties	Viscosity	Appearance	Specific Gravity 20° C
<ul style="list-style-type: none"> <li>» Water Soluble Before Drying</li> <li>» Air Drying &amp; Curing</li> <li>» Single Component</li> </ul>	Creamy Paste	White	0.88
	<b>Complete Curing</b>		<b>Final Finish</b>
	72 Hours @ 25° C		Translucent
<b>Water Permeability</b>	<b>Adhesion Strength</b>		<b>Surface Drying Time</b>
Negligible	Excellent		24 Hours @ 25° C
<b>Sofetning Point</b>	<b>Storage &amp; Pot Life</b>		<b>Coverage</b>
90° C	36 Months   Store Between 10 To 35		Depends upon Grooves of Cracks/Joints

Note : The Product material can be renewed by the company for the betterment at anytime without any notice/information.

## SURFACE PREPARATION & APPLICATION PROCEDURE

- Clean the Surface thoroughly, as it should be free from dust, oil, etc.
- Rough the surface (where the poly fillastomer is to be applied) with sand paper for better adhesion.
- Apply the polymer compound with the help of funner patti/iron blade/on the area
- Wipe off the excess material.
- Let it cure for 72 hours.

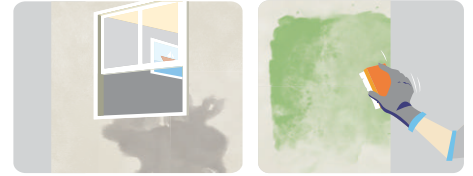

## Product Mixing Ratio (by volume)

Single pack

## Thinner / Cleaning Solvent

Water

## Caution

The applicators and operators must be trained, experienced and have the understanding and equipment to mix/stir and apply the coatings correctly and according to Nushar technical protocol. Applicators and operators shall use appropriate personal protection when using these products.

## Health and safety

Please study the safety precautions mentioned on the container. Apply the products under well ventilated conditions. Ensure that spray mist is not inhaled and skin contact with the product should be avoided. Spillage on the skin should immediately be removed with suitable cleanser, soap and water. If the eyes feel any burning sensation then they should be flushed with ample water and the Doctor should be immediately consulted.

**Note: We do not undertake any legal obligation for the product as its proper application is equally important. We accept no legal responsibility for the work done even by trained applicators as we have no control over what they are actually doing on the site. The consumer has to first satisfy himself/herself by observing work done by us & by visiting our display gallery.**

All subject to the jurisdiction of courts in Jodhpur, Rajasthan.