

Technical Data Sheet Inex Emulsion



PRODUCT OVERVIEW

INEX emulsion is designed on concept of "PAINT FOR ALL" which is a water based Interior/Exterior wall finish suitable for dry to low humid climatic conditions.

TECHNICAL SPECIFICATIONS

Properties	Viscosity	Final Finish	Density
<ul style="list-style-type: none"> » Paint for all » Economical wall finish » Water/heat Proof » Matt finish » Non- fading/ Durable » Green Technology 	Paste	Matt	1.5 Kg/Ltr
Color / Apperance	Complete Curing	Type	
White Paste like.	24 Hours @ 25° C	Gel	
Water Permeability	Bonding Strength	Surface Drying Time	
Negligible	Excellent	45-60 Min @ 25° C	
Sofetning Point	Storage & Pot Life	Coverage	
90° C	36 Months Store Between 10 To 35	55-65 sqft/Kg	

SURFACE PREPARATION


- » The surface should be free from oil, grease, dust (loose particles) and moisture.
- » Any seepage problem should be repaired before paint applying "**INEX emulsion**"
- » It is recommended to use wire brush followed by sanding with emery.
- » For Re-Paint work it is recommended to use Nushar's Old Paint Fixer to save time & labour

PACKING

- 20Kg.
- 10 Kg.
- 4 Kg.
- 1 Kg.



Shelf life : 3years from the date of manufacture in original tight closed containers & to be stored away from direct sunlight and excessive heat.

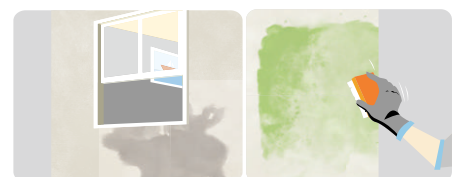

APPLICATION PROCEDURES

PROCESS OF APPLYING

- » Prepare the surface up to putty level.
- » Clean the putty surface with wet cloth before applying paint.
- » Apply 1 coat of 40% diluted primer on the putty.
- » Apply 2-3 coat of Inex emulsion paint.
- » 3rd or final coat should be thin for better finish.

Product Mixing Ratio (by volume)

Single Component

Thinner / Cleaning Solvent

Water

Caution

The applicators and operators must be trained, experienced and have the understanding and equipment to mix/stir and apply the coatings correctly and according to Nushar technical protocol. Applicators and operators shall use appropriate personal protection when using these products.

Health and safety

Please study the safety precautions mentioned on the container. Apply the products under well ventilated conditions. Ensure that spray mist is not inhaled and skin contact with the product should be avoided. Spillage on the skin should immediately be removed with suitable cleanser, soap and water. If the eyes feel any burning sensation then they should be flushed with ample water and the Doctor should be immediately consulted.

Note: We do not undertake any legal obligation for the product as its proper application is equally important. We accept no legal responsibility for the work done even by trained applicators as we have no control over what they are actually doing on the site. The consumer has to first satisfy himself/herself by observing work done by us & by visiting our display gallery.

All subject to the jurisdiction of courts in Jodhpur, Rajasthan.