




Technical Data Sheet Master Adhesive

PRODUCT OVERVIEW

Master Adhesive is a combination of polymers, plasticizer and inert filler material for cladding & flooring purpose.

PRODUCT BENEFITS	PACKING
<ul style="list-style-type: none"> Matt Finish Water Proof Anti Bacterial 	<ul style="list-style-type: none"> 22.500 Kg. 11.25 Kg. 6 Kg. 2.25 Kg. 1 Ltr.  <p>Shelf life : 2 years from the date of manufacture in original tight closed containers & to be stored away from direct sunlight and excessive heat.</p>


TECHNICAL SPECIFICATION

Properties	Viscosity	Colour	Density
<ul style="list-style-type: none"> » Water Soluble Before Drying » Air Drying & Curing » Single Component 	Paste	Off White	1.7 gm/cc
Acid Resistance	Complete Curing	Storage & Pot Life	
48 Hours @ 25° C (upto 20% concentration)	48 Hours @ 25 C	24 Months Store Between 10 To 35	
Coverage	Adhesion Strength		
10-12 sqft/Kg	Excellent		

Note : The Product material can be renewed by the company for the betterment at anytime without any notice/information.

SURFACE PREPARATION

- Clean the Surface thoroughly, as it should be free from dust, oil, etc.
- Remove existing Paint Layer/ Coating before applying "**Master Adhesive**"

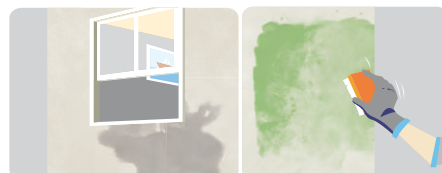

APPLICATION AREA

- » Cladding of exterior stone, Granite, Tiles in elevation.
- » Bathroom Tiles fitting and interior tiles or stones over "Zero level" (0 level) plastered surface.
- » Stone fitting on floors , staircase, skirting.

DIRECTION OF USE

- » It is a ready to use adhesive.
- » Before application ensure that the level of plastered surface should be "0" level. (to reduce material consumption)
- » Clean the surface thoroughly & ensure dust free surface.
- » Apply Master Adhesive on Stone / Tile with iron grooved Blade, spread thoroughly over the surface.
- » Press the Stone / Tile against the application surface and apply some pressure.
- » Remove the excess material.
- » Then follow the same steps for rest of the Stone / Tile.
- » For Better results apply primer coat of **Smart Master Coat** on plaster surface and also on base of the stone/Tile.
- » Wait for 48 hrs. before use.

Product Mixing Ratio (by volume)

Single pack

Thinner / Cleaning Solvent

Water

Caution

The applicators and operators must be trained, experienced and have the understanding and equipment to mix/stir and apply the coatings correctly and according to Nushar technical protocol. Applicators and operators shall use appropriate personal protection when using these products.

Health and safety

Please study the safety precautions mentioned on the container. Apply the products under well ventilated conditions. Ensure that spray mist is not inhaled and skin contact with the product should be avoided. Spillage on the skin should immediately be removed with suitable cleanser, soap and water. If the eyes feel any burning sensation then they should be flushed with ample water and the Doctor should be immediately consulted.

Note: We do not undertake any legal obligation for the product as its proper application is equally important. We accept no legal responsibility for the work done even by trained applicators as we have no control over what they are actually doing on the site. The consumer has to first satisfy himself/herself by observing work done by us & by visiting our display gallery.

All subject to the jurisdiction of courts in Jodhpur, Rajasthan.